

QG65N-KDXYh-030-CANS-CM

## Inclination sensor for SIL2 / PLd applications

2 axis horizontal mounting

Output  
CANopen Safety

Supply voltage  
8 - 60 Vdc

Measuring range  
 $\pm 30^\circ$



CANopen  
safety easy to use



### QG65N-KDXYh-030-CANS-CM

Housing
Dimensions (indicative)
Mounting
Ingress Protection (IEC 60529)
Relative humidity
Weight
Supply voltage
Polarity protection
Current consumption
Operating temperature
Storage temperature
Measuring range
Centering function
Frequency response (-3dB)
Accuracy (2 $\sigma$ )
Offset error
Non linearity
Sensitivity error
Resolution
Temperature coefficient
Max mechanical shock
CAN interface (hardware)
CAN communication profile
Baud rate
Node Id
TPDO1 event time
Sync mode (TPDO's), Heartbeat
Output format
SRDO1
SRDO2
Safeguard cycle time (SCT)
Safety related validation time (SRVT)
Filtering
Reaction on error
Boot time


### General specifications v20150916

Plastic injection molded housing (Faradex DS, black, EMI shielded by stainless steel fiber in PC)
60x50x27 mm
4x M5x25 mm zinc plated pozidrive screws included (optional: 2x $\varnothing$ 4mm positioning pins)
IP67
0 - 100%
ca 110 gr
8 - 60 Vdc
Yes
$\leq 75$ mA
-40 .. +85°C
-40 .. +85°C
$\pm 30^\circ$
Yes (CANout 0 = 0°), range: $\pm 5^\circ$
10 Hz
overall 0,09° typ.
$< \pm 0,03^\circ$ typ. ( $< \pm 0,08^\circ$ max.) after centering
$< \pm 0,09^\circ$ typ. ( $< \pm 0,19^\circ$ max.)
not applicable
0,01°
$\pm 0,009^\circ$ /K typ.
10.000g
CAN 2.0 A and B according to ISO 11898-1 & ISO 11898-2
CANopen Safety according to EN50325-5 & CANopen according to EN50325-4 (CiA301 4.2.0)
125 kbit/s (default, range 125/250/500/1000 kbit/s)
01h (default, range: 01h - 3Fh)
50 ms (default, range 10-500 ms)
off (default, range on/off)
Integer: -3000 to +3000 (SRDO:X=byte 2,1; Y=byte 4,3) (byte 5,6,7,8: integer 0)
FFh + 2x node ID (for Node ID=01h: SRDO1=101h)
100h + 2x node ID (for Node ID=01h: SRDO2=102h)
40ms
20ms
Input filter enabled, output filter disabled
Emergency message 080h+Node-ID folowed by NMT stop state (no CAN communication)
$< 1$ s

## QG65N-KDXYh-030-CANS-CM

CANoutput =  $100 \cdot \alpha$   
clipping outside measuring range


## Transfer characteristic



## QG65N-KDXYh-030-CANS-CM

Default 0°: horizontal, no acceleration applied.  
Cross tilt sensitivity error:  
 $< (0,12 \cdot \text{cross tilt angle})^2$  % typ.  
Note:  
one axis  $< 10^\circ$  tilt for max. accuracy

## Measurement orientation

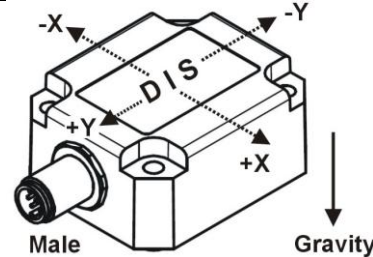

## QG65N-KDXYh-030-CANS-CM

Connection

Wire / pin coding

## Connectivity (length $\pm 10\%$ )


M12 connector: 1x male (5 pins, A-coding) ( CiA303 V1.8.0 )  
No bus termination inside. A CANbus always has to be terminated properly.

Pin 1: Shield  
Pin 2: Vcc  
Pin 3: Gnd & CAN\_GND  
Pin 4: CAN\_H  
Pin 5: CAN\_L



## QG65N-KDXYh-030-CANS-CM

## Mechanical dimensions (indicative only)

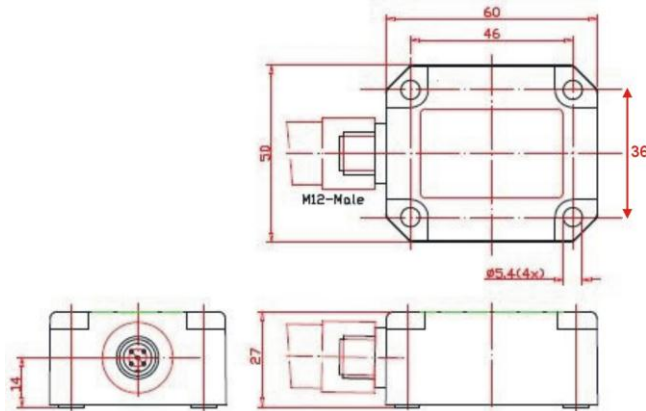

## QG65N-KDXYh-030-CANS-CM

## CAN-manual, EDS-file, Safety information

A preliminary CANopen-safety manual is available at [www.dis-sensors.com](http://www.dis-sensors.com), see 'downloads'  
A preliminary EDS-file ( CiA306 V1.3.0) is available at [www.dis-sensors.com](http://www.dis-sensors.com), see 'downloads'  
A Declaration of Conformity is not yet available

### Safety information:

- Read this datasheet and the relevant manual before using this device as safety device
- This device is partial redundant and can be used in SIL2/PLD applications ONLY if the supplied safety information on this datasheet fulfills customer demand for the desired safety level.
- architecture: HFT=0 (according IEC 62061, CAT.2 (according to EN ISO 13849)
- MTTFd: 598 year, DC: 91%, CCF: 70 pt, SFF: tbd%, PFHd: tbd
- EC type examination Pending
- only a SELV power supply should be used
- error: any detected error or a difference of  $> 3^\circ > 2$  sec. between the two redundant sensor paths (parameters adjustable via CANbus to fit the application)

As this device is accelerometer-based the sensor is inherent sensitive for accelerations/vibrations. Application specific testing must be carried out to check whether this sensor will fulfill your requirements.