

LINEAR POTENTIOMETERS

Linear Potentiometers

Long Stroke





Model
RTL

- Measuring length 30 - 1000 mm
- Infinite resolution
- Excellent repeatability <0,01 mm
- Long mechanical life 100 million movements
- Easy installation with fixing brackets
- IP 67 protection level



Model
RPH

- Measuring length 100 - 1950 mm
- With sliding head reducing overall dimension
- Excellent repeatability <0,01 mm
- Long mechanical life 100 million movements
- Rodless design
- IP 40 protection level (if mounted upside down IP 53)



Model
LPC

- Measuring length 50 - 800 mm
- Orbital movement with ball joints on the both sides
- Excellent repeatability <0,01 mm
- Long mechanical life 100 million movements
- Strong mechanical structure (10 mm rod diameter)
- IP 65 protection level



Model
RTM

- Measuring length 50 - 600 mm
- Infinite resolution
- Excellent repeatability <0,01 mm
- Long mechanical life 100 million movements
- Orbital movement in square body without fixing brackets
- IP 65 protection level



Model
LPS

- Measuring length 30 - 150 mm
- Infinite resolution
- Excellent repeatability <0,01 mm
- Long mechanical life 50 million movements
- IP 54 protection level



Model
LSC

- Measuring length 25 - 400 mm
- Cable output
- Excellent repeatability <0,01 mm
- Long mechanical life 50 million movements
- IP 67 protection level




Model
OPH

- Measuring length 50 - 1000 mm
- Cost effective compact design
- Excellent repeatability <0,01 mm
- Long mechanical life 50 million movements
- Open profile
- Easy and flexible installation

Linear Potentiometers

Slim Body Compact Design Short Stroke

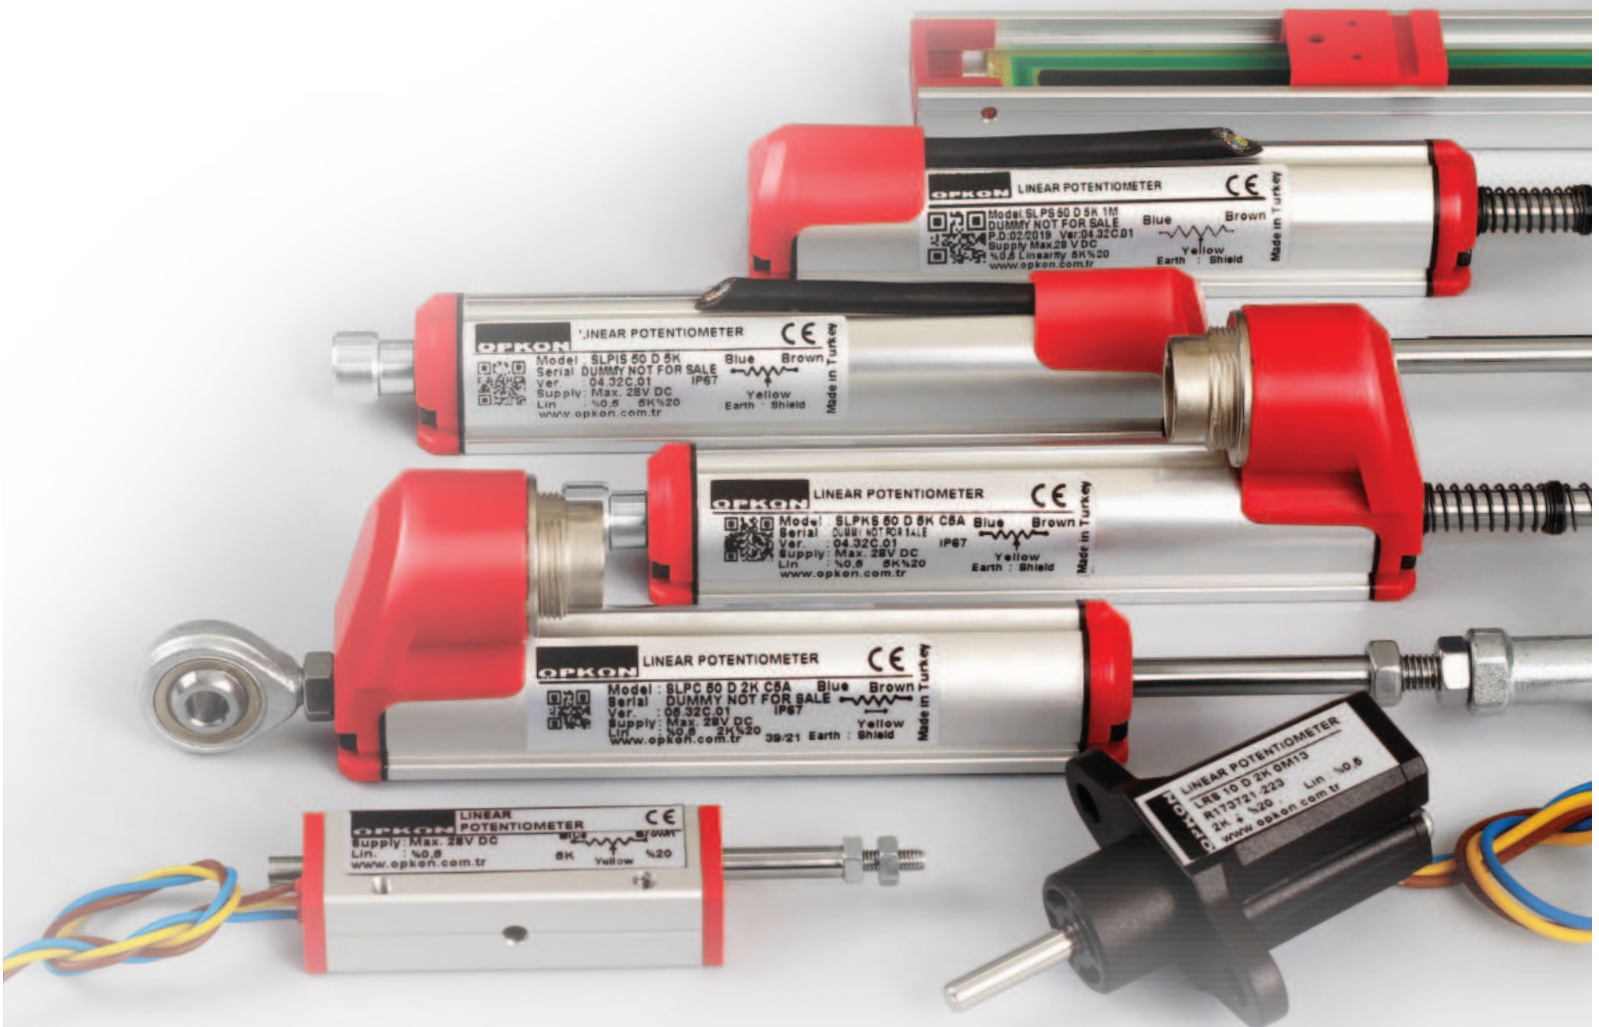



Model
SLPT

- Measuring length 10 - 400 mm
- $\pm 0,05$ linearity
- Long mechanical life 50 million movements
- Compact design
- For narrow space applications



Model
SLPC

- Measuring length 10 - 400 mm
- Compact design
- Long mechanical life 50 million movements
- Orbital movement with ball joints on the both sides
- High accuracy and excellent repeatability



Model
SLPS

- Measuring length 10 - 100 mm
- External spring loaded
- Useful for flatness and thickness measurements



Model
SLPK

- Measuring length 10 - 200 mm
- Double-side rod
- Long mechanical life 50 million movements
- High accuracy and repeatability



Model
SLPKS

- Measuring length 10 - 100 mm
- Double-side rod with external return spring
- Long mechanical life 50 million movements
- Ideal for thickness measurements



Model
SLPIS

- Measuring length 10 - 100 mm
- Internal return spring
- Long mechanical life 50 million movements
- Probe or roll bearing type
- High repeatability and accuracy



Model
LMT / LMTIS

- Measuring length 10 - 25 mm
- Infinite resolution
- Ultra compact design with robust aluminium housing
- Long mechanical life 50 million movements
- Easy mounting by thread holes



Model
SOPH

- Measuring length 25 - 150 mm
- Infinite resolution
- Special teflon guiding system
- Long mechanical life 50 million movements




Model
LRS

- Measuring length 10 - 25 mm
- Infinite resolution
- Excellent repeatability $< 0,02$ mm
- Long mechanical life 50 million movements

Linear Potentiometers

Long Stroke With Internal Signal Conditioner

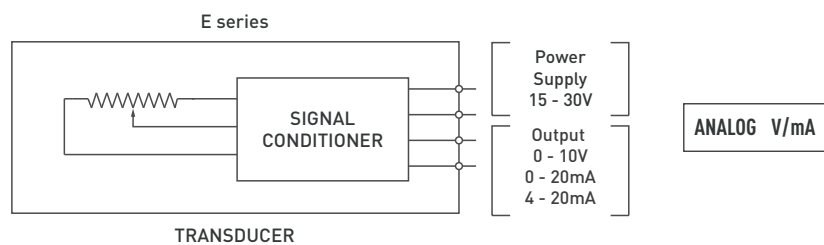



Model
ERTL

- Measuring range 30 - 1000 mm
- Internal signal conditioner
- Output 0-10 V, 0-20 mA, 4-20 mA
- Infinite resolution
- Easy installation with fixing brackets
- IP 67 protection level




Model
ERPH

- Measuring range 100 - 1950 mm
- Internal signal conditioner
- Output 0-10 V, 0-20 mA, 4-20 mA
- Rodless design
- IP 40 (if mounted upside down IP 53)



Model
ELPC

- Measuring range 50 - 800 mm
- Internal signal conditioner
- Output 0-10 V, 0-20 mA, 4-20 mA
- Orbital movement via ball joints on the both sides
- Strong mechanical structure (10 mm rod diameter)
- IP 67 protection level

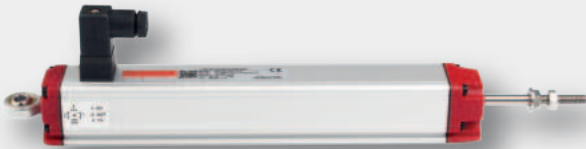

Model
ERTM

- Measuring range 50 - 600 mm
- Internal signal conditioner
- Output 0-10 V, 0-20 mA, 4-20 mA
- Orbital movement in square body fixing without brackets
- Infinite resolution
- IP 65 protection level



Model
ELSC

- Measuring range 25 - 400 mm
- Internal signal conditioner
- Output 4-20 mA / 10-0 V / 0-5V, 5-0V
- Excellent repeatability
- IP 67 protection level



Model
OP-SC1A

- Rail type (OP-SC1A)
- Signal conditioner for resistive potentiometers
- Standard output signals (0-10 V, 0-20 mA, 4-20 mA)



Model
OP-SC1B

- Connector type (OP-SC1B)
- Signal conditioner for resistive potentiometers
- Standard output signals (0-10 V, 0-20 mA, 4-20 mA)



TÜRKİYE
Headquarter, R&D, Production

OPKON Optik Elektronik Kontrol Sanayi ve Ticaret A.Ş.
Terazidere Mah. 29 Ekim Cad. No:34 Bayrampaşa / İstanbul / TÜRKİYE
Tel : +90 (212) 501 48 63
Fax : +90 (212) 501 48 83
Web : www.opkon.com.tr
E-mail : export@opkon.com.tr

GERMANY
Subsidiary

SENSORMARKET GmbH
Graeffstrasse. 5, 50823 Köln / GERMANY
Tel : +49 22159495400
Fax : +49 22159495402
Web : www.sensormarker.eu
E-mail : sales@sensormarket.eu

CHINA
Subsidiary

DANZI Sense Technology
(Shanghai) Co., LTD. Room 123 - B, F/1, No. 1000 Ziyue Road, Minhang District, 200240 Shanghai / CHINA
Hotline : 400 8050 889
Tel : 021 - 64091719
Fax : 021 - 64091713
Web : www.opkonchina.com
E-mail : marketing@opkonchina.com

opkon.com.tr

Please note: The specifications and information in this datasheet may not cover all special demands arising from specific applications. Therefore, they do not constitute a comprehensive description of the product properties. OPKON accepts no responsibility for damages resulting from the improper application of our products. The user is responsible for ensuring that the products used are suitable for their own application.