

orbitACS

SI400

A Four Channel system for easy connections into PLC or Automation

Description

Solartron Metrology, the world leader in linear measurement innovation, introduces a new Orbit[®]3 based system for easy, low cost connections into PLCs and process control systems. The SI400 will connect to, and power, three additional sensors for a four channel reading. You can even combine gauging probes, Orbit[®] LT, and Orbit[®] LTH on the same stack of modules. No other digital system offers this!

Features

Integral Readout with colour LCD Display and keypad.

Set tolerance and process limits via keypad

Detachable probe plug on housing for easy installation.
(Gauging probes, Block Gauges & Flexures only)

Replace probe with no calibration or reprogramming


Modbus output (RTU or ASCII) over RS485 or RS232

Programmable discrete I/O (4 inputs, 3 outputs)

Track, Peak, and Max-Min Modes for each channel

24 VDC Power Supply




Works with Gauging Probes (all types), Displacement, Orbit[®] LT, and Orbit[®] LTH.

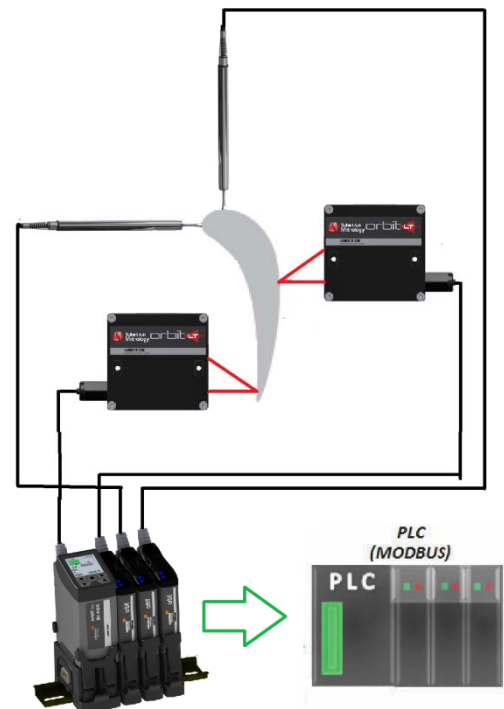

Precision. Quality. Reliability

www.solartronmetrology.com • sales.solartronmetrology@ametech.com

SI 400 Applications

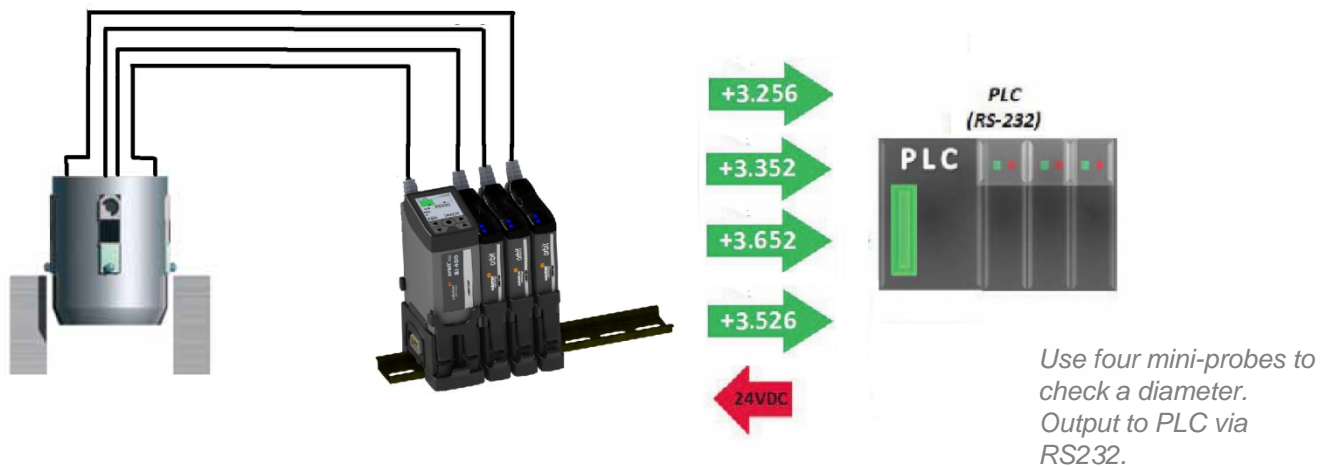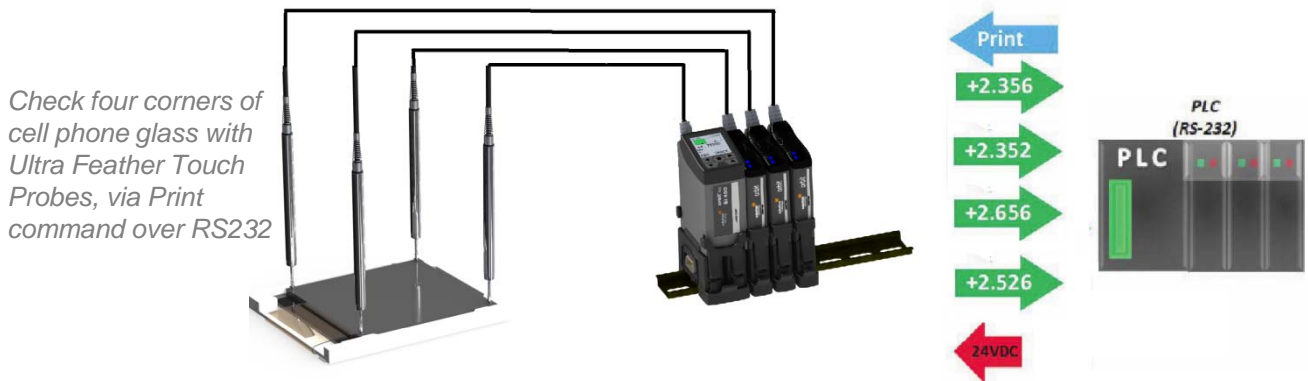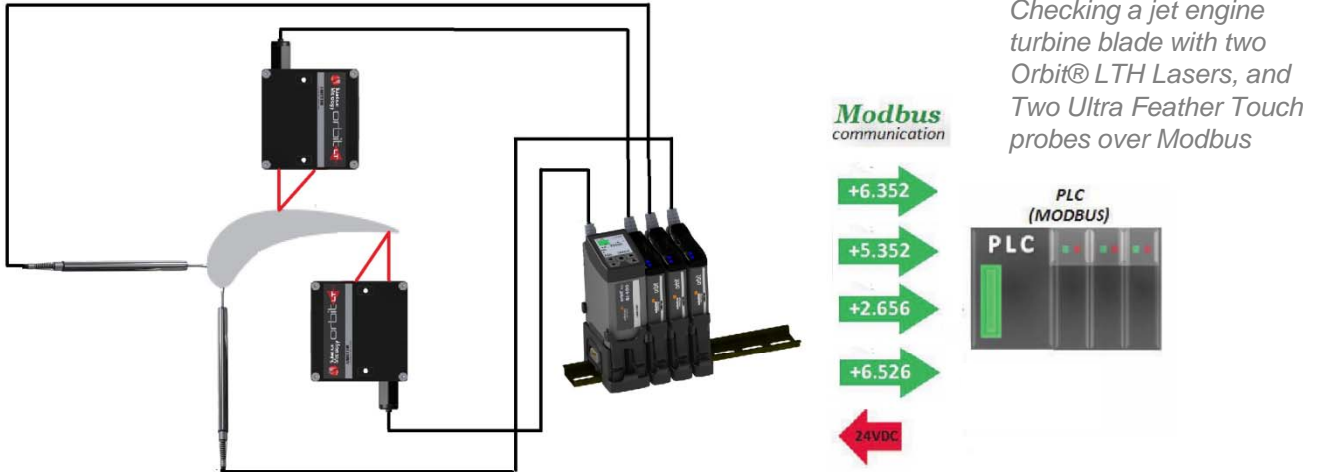

Pin Configuration

12	Input 4
11	Input 3
10	Input 2
9	Input 1
8	Output Supply In
7	Output 3
6	Output 2
5	Output 1
4	Modbus B (RS485 or RS232)
3	Modbus A (RS485 or RS232)
2	0V Power in Return
1	18-32 V DC Power In

Mini-USB Port for configuration via a PC and firmware updates



- Input pins can be set Active Hi or Active Lo
- Output pins can be Active Hi or Active Lo and set to NPN, PNP or Logic
- DIN Rail mount
- Input pins are programmable (typical functions: Zero, Print, Preset)


Serial Output Options

The SI400 has a standard Modbus interface (RTU or ASCII). However, pins 3 & 4 can be configured as an ASCII serial interface. (Pin 3: RS232TX, Pin 4: RS232 RX). In this mode, the user can select from several different ASCII protocols, including compatibility with Solartron's SI1500, SI3500 and C55.

Accessories


- +24 V Power Block with Mains Leads. Available with UK, EU, and US plugs
- Spare T-con Mounts
- USB to Mini-USB cable for PC connection

Display and Interface

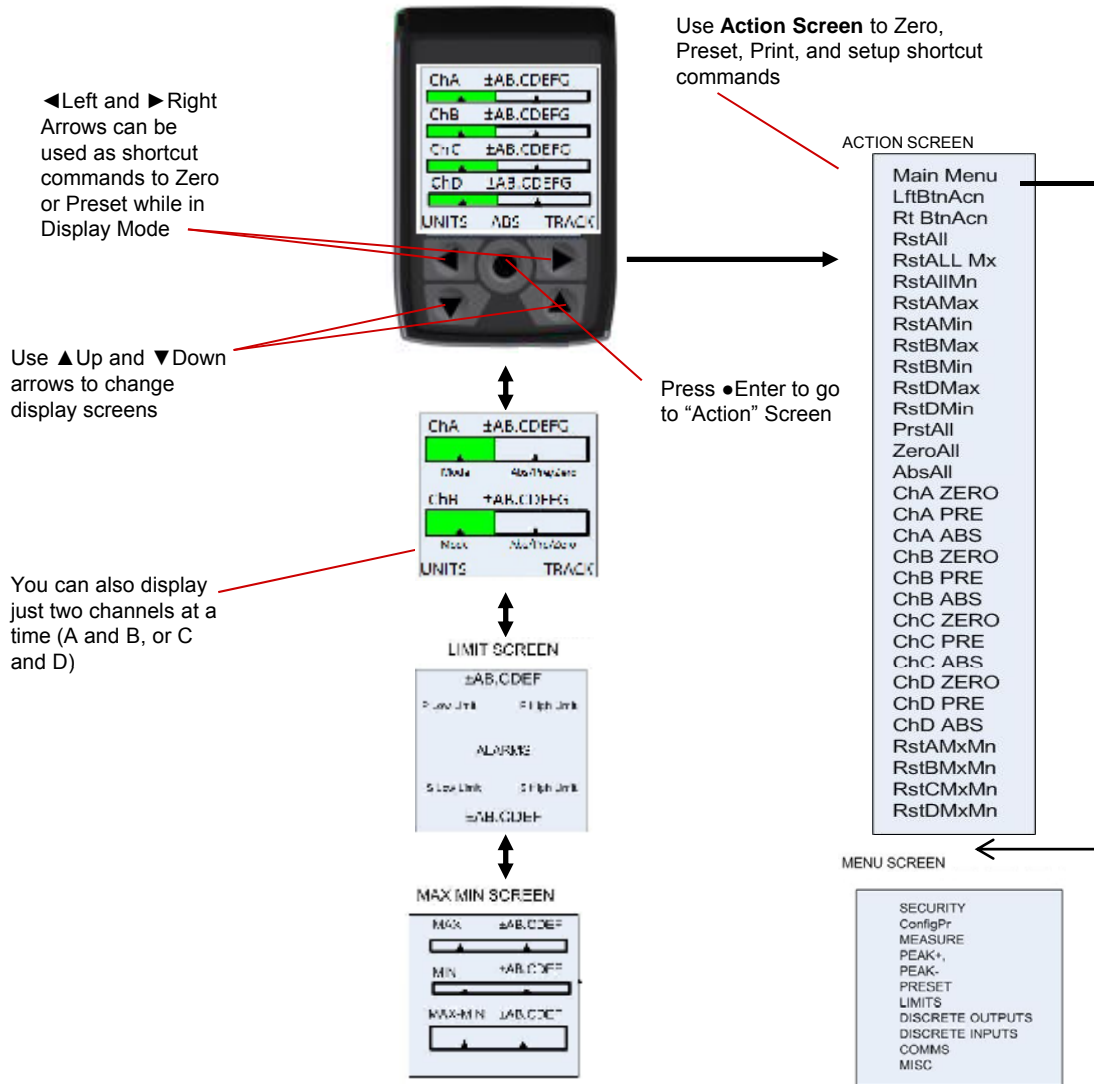

Configurator Software

Connect SI400 to PC via Mini-USB to USB cable. Then use Solartron provided software to configure unit, and backup settings to PC file!

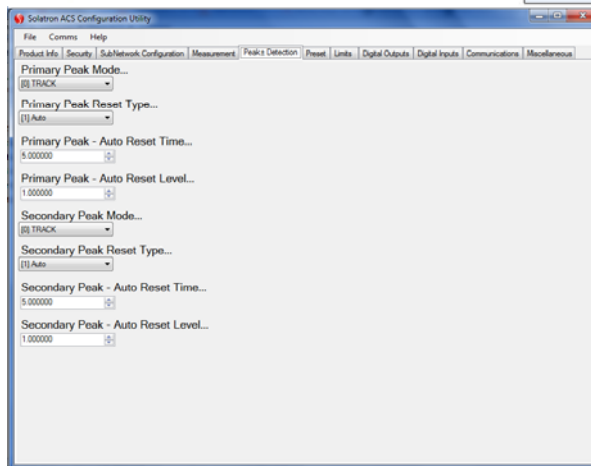

Products						
Spring Push Axial Cable	SI400P/1/S	SI400P/2/S	SI400P/5/S	SI400P/10/S	SI400P/20/S	SI400P10/2S
Spring Push Radial Cable		SI400PR/2/S	SI400PR/5/S	SI400PR/10/S	SI400PR/20/S	SI400PR10/2/S
Spring Push Axial Cable Feather Touch		SI400T/2/S	SI400T/5/S	SI400T/10/S	SI400T/20/S	SI400T10/2S
Spring Push Radial Cable Feather Touch		SI400TR/2/S	SI400TR/5/S	SI400TR/10/S	SI400TR/20/S	SI400TR10/2S
Pneumatic Axial Cable		SI400P/2/P	SI400P/5/P	SI400P/10/P	SI400P/20/P	SI400P10/2S
Pneumatic Radial Cable		SI400PR/2/P	SI400PR/5/P	SI400PR/10/P	SI400PR/20/P	SI400PR10/2/P
Pneumatic Axial Cable Feather Touch		SI400T/2/P	SI400T/5/P	SI400T/10/P	SI400T/20/P	SI400T10/2S
Pneumatic Radial Cable Feather Touch		SI400TR/2/P	SI400TR/5/P	SI400TR/10/P	SI400TR/20/P	SI400TR10/2S
Measurement Performance						
Measurement Range	1	2	5	10	20	2
Accuracy (% of Reading) (Note 1)	0.2	0.2	0.15	0.15	0.15	0.2
Repeatability (worst case) μm (Note 2)	0.15	0.15	0.15	0.15	0.15	0.15
Repeatability (typical) μm (Note 3)	0.05	0.05	0.05	0.07	0.07	0.05
Resolution (μm)	0.01	0.01	0.05	0.05	0.1	0.01
Pre Travel (mm)	0.15	0.15	0.15	0.15	0.15	0.15
Post Travel (mm)	0.35	0.85	0.85	0.85	0.85	8.85
Tip Force (N) at Middle of Range $\pm 20\%$						
Spring Push	0.7	0.7	0.7	0.7	0.7	0.7
Spring Push Feather Touch	0.3	0.3	0.3	0.3	0.3	0.3
Pneumatic at 0.4 bar	N/A	0.7	0.7	0.7	0.7	0.7
Pneumatic at 1 bar	N/A	2.6	2.6	2.6	2.6	2.6
Pneumatic Feather Touch $\pm 30\%$ at 0.3 bar	N/A	0.18	0.18	0.18	0.18	0.18
Pneumatic Feather Touch $\pm 30\%$ at 1 bar	N/A	1.1	1.1	1.1	1.1	1.1
Pneumatic Jet	N/A	0.85	0.85	0.85	0.85	0.85
Temperature Coefficient %FS/ $^{\circ}\text{C}$	0.01	0.01	0.01	0.01	0.01	0.01
Environmental						
Sealing for Probe	IP65 with gaiter or IP50 without gaiter					
Sealing for Probe Interface Electronics	Top and Front: IP41, Rear: IP20, In line connector: IP67					
Storage Temperature ($^{\circ}\text{C}$)	-20 to +70					
Probe Operating Temperature with Gaiter ($^{\circ}\text{C}$)	+5 to +80					
Probe Operating Temperature without Gaiter ($^{\circ}\text{C}$)	-10 to +80					
Electronics Operating Temperature ($^{\circ}\text{C}$)	0 to 60					
EMC Emissions	EN61000-6-3 and EN61326					
EMC Immunity	EN61000-6-2 and EN61326					
Power	18 to 32 VDC @ 0.07A typical					
Material						
Probe Body	Stainless Steel					
Probe Tip (options)	Nylon, Ruby, Silicon Nitride, Tugsten Carbide					
Gaiter (standard)	Fluoroelastomer					
Cable	PUR					
Electronics Module	ABS					
Electronics Interface (Orbit ACS)						
Alarm Outputs - selectable High, OK, Low	3 outputs either NPN, PNP, logic Programmable Active Hi or Lo					
Discrete Inputs - user selectable	4 inputs user configurable eg. Print, Zero, Preset					
Update Rate for I/O discretes (ms)	5					
Bandwidth of Electronics (Hz) - user selectable	460, 230, 115, 58, 29, 14, 7, 4					
Communications Interface Protocol	MODBUS (RTU or ASCII) or Solartron Serial Formats					
Communications Interface Hardware	RS485 or RS232 (User selectable) Up to 115,200 Baud					
Update Rate for Serial Data (ms)	25					
Note 1: Accuracy 0.1 μm or % reading whichever greater						
Note 2: Obtained by repeated operation against a carbide target with side load applied to the bearing using max-min						
Note 3: Obtained by repeated operation against a carbide target standard deviation from average (68%)						

For specifications of other Gauging and Displacement Transducers, Orbit[®] LT, or Orbit[®] LTH, please refer to their respective datasheets.


www.solartronmetrology.com • sales.solartronmetrology@ametek.com

Instrument Functionality	
Measurement	
Measurement SI400	A, MAXA-MINA, B, MAXB-MINB, C, MAXC-MINC, D, MAXD-MIND,
Measurement Types	Track. Peak+, Peak -
Measurement Modes	Absolute, Zero (tare), Preset
Measurement Units	mm, inches, mils
Display	
Analogue SI400	Four Bars representing reading showing limits
Digital SI400	Four Digital up to 5 decimal places mm (6 for inches)
Keypad	
Type	Sealed Membrane

For Gauging probes, SI100 and SI200 can also be ordered with no plug for higher accuracy, or inline plug along cable
 - Specs are for standard, plugged, gauging probes only. Specs will vary with other sensors. If considering another sensor, contact your local Solartron representative for details.
 - Standard cable length is 2 meters. Special cable lengths can be ordered.

www.solartronmetrology.com • sales.solartronmetrology@ametek.com

Drawing

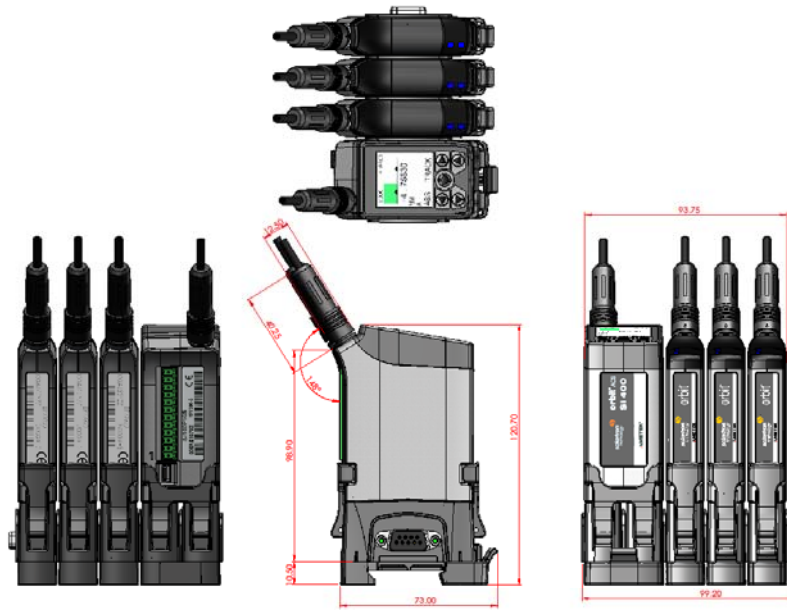

For 3D drawings, please contact sales.solartronmetrology@ametek.co.uk

United Kingdom - Head Office

Solartron Metrology
Steyning Way
Bognor Regis
West Sussex
PO22 9ST
Tel: +44 (0) 1243 833333
Fax: +44 (0) 1243 833322
Sales.solartronmetrology@ametek.com

France

Solartron Metrology
Rond-point de l'Espine des Champs
Buroplus - Bat. D
Elancourt 78990
Tel: +33 (0)1 30 68 89 50
Fax: +33 (0)1 30 68 89 59
france.solartronmetrology@ametek.com

Germany

Ametek GmbH
Solartron Metrology Division
Rudolf-Diesel-Strasse 16
40670 Meerbusch
Tel: +49 (0) 2159 9136 500
Fax: +49 (0) 2159 9136 505
vertrieb.solartron@ametek.de

Brazil

Ametek do Brasil, Ltda
Rod. Eng Ermenio de Oliveira Penteado, Km 57, SP75
Bairro Tombadouro
13337-300, Indaiatuba, SP, Brazil
Tel: +55 19 2107 4126

India

Ametek Instruments India Private Limited
1st Floor, Left Wing
Prestige Featherlite Tech Park
Plot #148, EPIP II Phase
Whitefield, Bengaluru 560 066
Karnataka, India
Tel: +91 80 6782 3200
Fax: +91 80 6782 3232

USA

Solartron Metrology
USA Central Sales Office
915 N.New Hope Road, Suite C
Gastonia, NC 28054
Tel: +1 800 873 5838
Fax: +1 704 868 8466
usasales.solartronmetrology@ametek.com

China

AMETEK Commercial Enterprise (Shanghai) Co. Ltd
No. 1 AMETEK Road
Ju Ting Economic Development Zone
Shanghai 201615
Tel: +86 21 5763 2509
Fax: +86 21 5866 0969 Ext. 261/262
china.solartronmetrology@ametek.com



**Solartron
Metrology**

Precision Driven

Offices worldwide
Agent and distributor details
available at
www.solartronmetrology.com



Q 09540

Solartron pursues a policy of continuous development. Specifications in this document may therefore be changed without notice.

AMETEK[®]
ULTRA PRECISION TECHNOLOGIES

Precision. Quality. Reliability

www.solartronmetrology.com • sales.solartronmetrology@ametek.com